

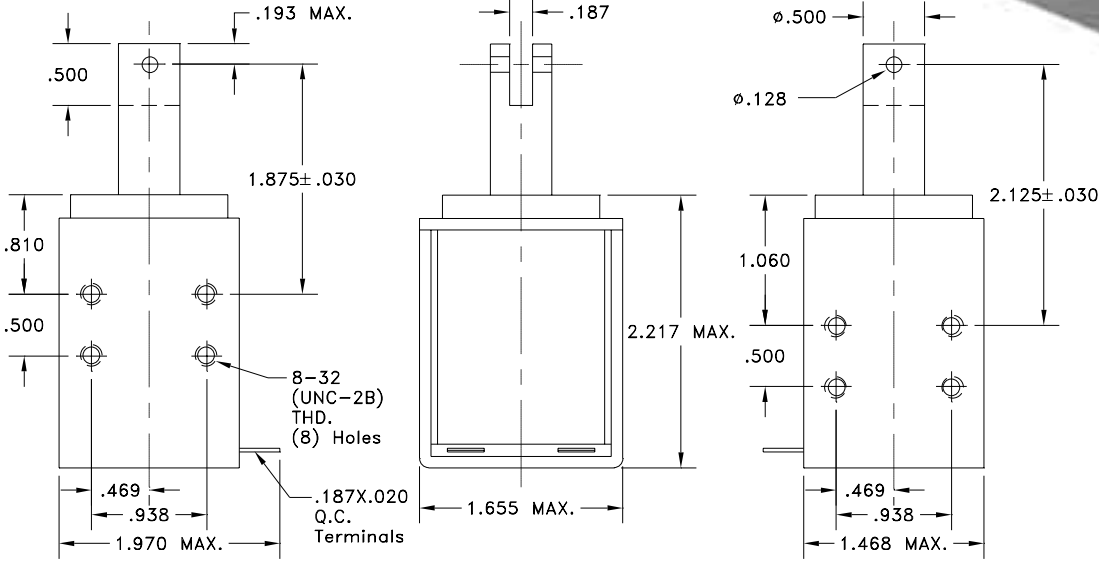


## SERIES FS 450

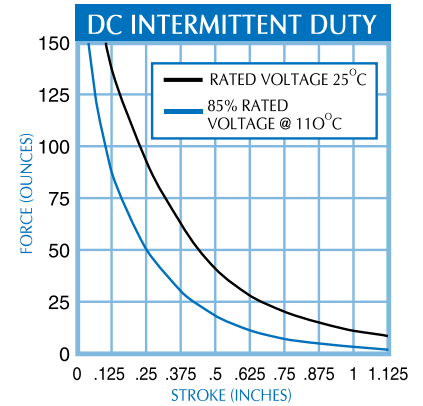

	D.C.		A.C.		
	CONT.	INT.	DUTY	CONT.	INT.
D.C. POWER WATTS	11	28	A.C. POWER VA	18	90
STD. D.C. VOLTAGES	D.C. COIL RESISTANCE (OHMS)		STD. A.C. VOLTAGES 60 HZ		
6	3	1.3	12	N/R	N/R
12	13	5.5	24	4.5	1.3
24	52	21	120	100	25
110	1100	430	240	400	110

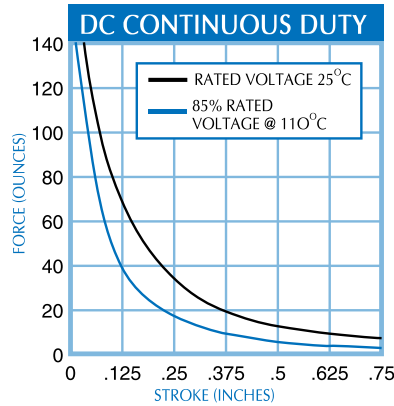

## SPECIFICATIONS

1. MAXIMUM OPERATING TEMPERATURE: 130°C
2. LIFE EXPECTANCY UNDER OPTIMUM LOAD: 5 x 10<sup>6</sup> CYCLES
3. DIELECTRIC STRENGTH: 1500 V. RMS
4. TERMINATION: .187 x .020 Q.C.
5. TOTAL WEIGHT: 14 oz. (392 grams)
6. PLUNGER WEIGHT: 2 oz. (56 grams)

DC Models Available with Plunger Stop.

INTERMITTENT DUTY CYCLE AT NOMINAL VOLTAGE IS 4 MINUTES MAXIMUM FOR A.C. AT 25% DUTY AND 5 MINUTES MAXIMUM FOR D.C. AT 25% DUTY CYCLE.

