



SERIES SQ 1000

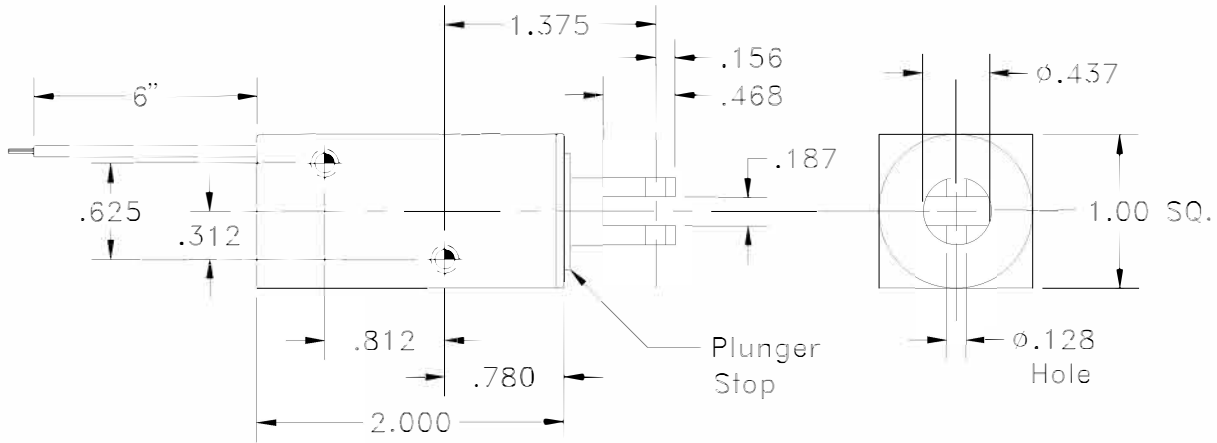

LENGTH INCHES	2.000		
DUTY	CONT.	INT.	PULSE
D.C. POWER WATTS	9	50	150
STD. D.C. VOLTAGES	STD. DC COIL RESISTANCE (OHMS)		
6	4	N/R	N/R
12	16	3	0.96
24	64	12	3.8
110	1344	242	80

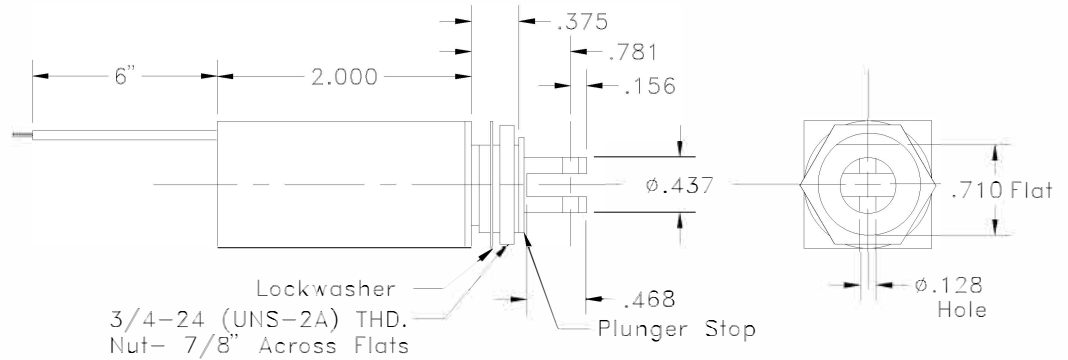

SPECIFICATIONS

1. MAXIMUM OPERATING TEMPERATURE: 130°C
2. LIFE EXPECTANCY UNDER OPTIMUM LOAD: 10⁶ CYCLES
3. DIELECTRIC STRENGTH: 1500 V. RMS
4. LEADS: AWG - 22 - U/L
5. TOTAL WEIGHT: 7.6 oz. (215 grams)
6. PLUNGER WEIGHT: 1.6 oz. (45 grams)

INTERMITTENT DUTY CYCLE AT NOMINAL VOLTAGE IS 1 MINUTE MAXIMUM ON TIME AT 10% DUTY. PULSE DUTY CYCLE IS 100 MILLISECONDS ON AT 10% DUTY.

