

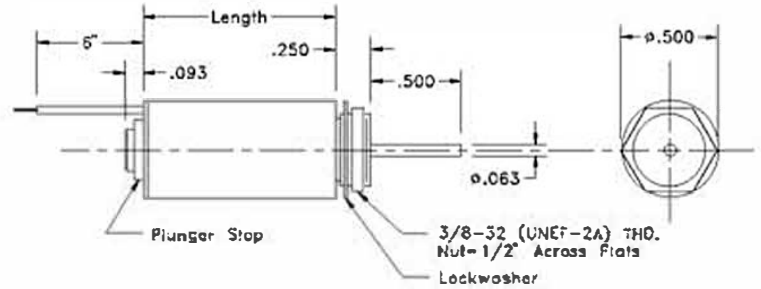
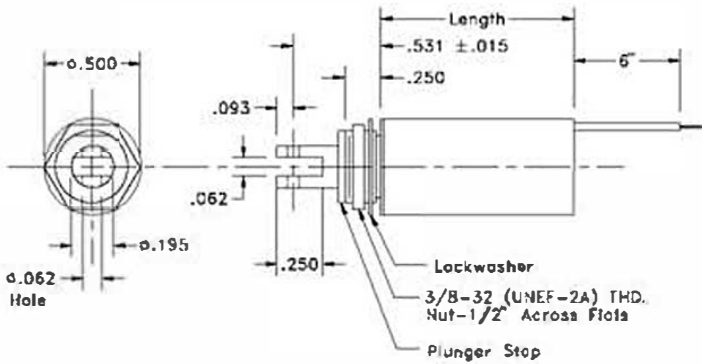
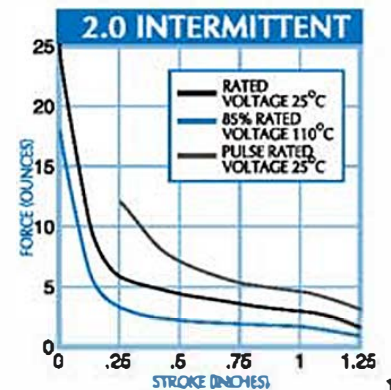
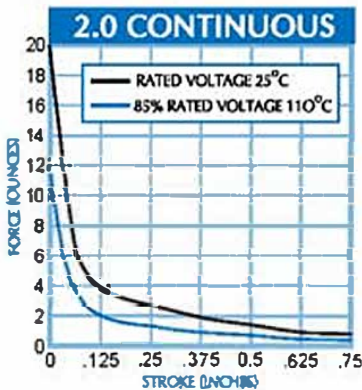
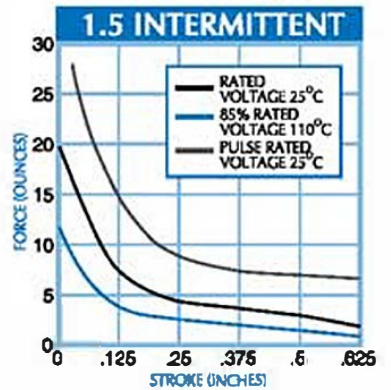
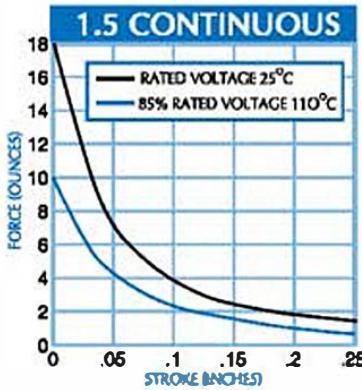


## SERIES TS 500

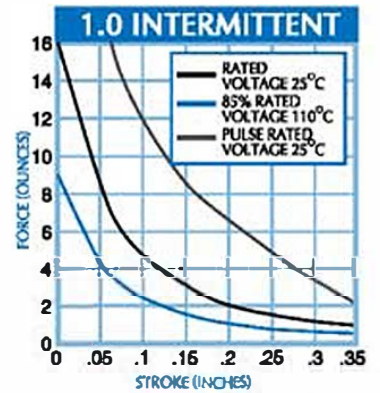

TSP 500

LENGTH INCHES	1.000			1.500			2.000		
	DUTY	CONT.	INT.	PULSE	CONT.	INT.	PULSE	CONT.	INT.
D.C. POWER WATTS	3.0	10	34	3.5	15	56	4.0	24	90
STD. D.C. VOLTAGES	STD. DC COIL RESISTANCE (OHMS)								
6	12	3.6	N/R	10	2.5	N/R	9	1.5	N/R
12	42	17	3.6	42	10	2.5	36	6	1.5
24	192	67	17	164	38	10	144	24	6
110	N/R	N/R	N/R	N/R	N/R	215	N/R	N/R	135

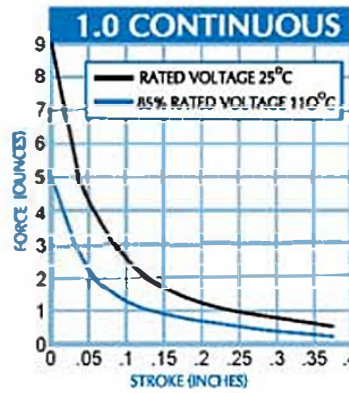

## SPECIFICATIONS

1. MAXIMUM OPERATING TEMPERATURE: 130°C
2. LIFE EXPECTANCY UNDER OPTIMUM LOAD: 10<sup>6</sup> CYCLES
3. DIELECTRIC STRENGTH: 1000 V. RMS
4. LEADS: AWG - 26 - U/L
5. TOTAL WEIGHT: 1.9 oz. (54 grams) MAX.
6. PLUNGER WEIGHT: 0.3 oz. (8.5 grams) MAX.

Both Models Available with or without Plunger Stop.

INTERMITTENT DUTY CYCLE AT NOMINAL VOLTAGE IS 1 MINUTE MAXIMUM ON TIME AT 10% DUTY. PULSE DUTY CYCLE IS 100 MILLISECONDS ON AT 10% DUTY.