

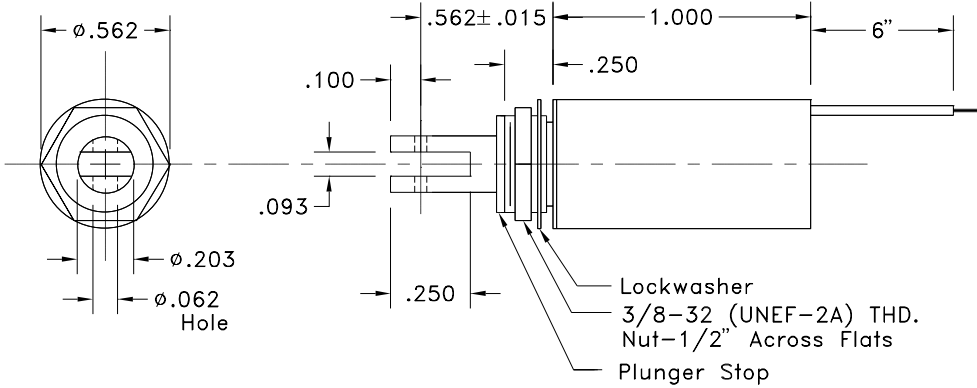


SERIES TS 562

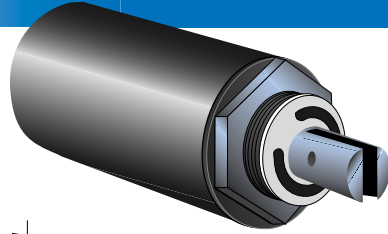



LENGTH INCHES	1.000			
	DUTY	CONT.	INT.	PULSE
D.C. POWER WATTS	3.75	11	35	
STD. D.C. VOLTAGES	STD. DC COIL RESISTANCE (OHMS)			
6	11	3	N/R	
12	38	13	4	
24	160	52	16	

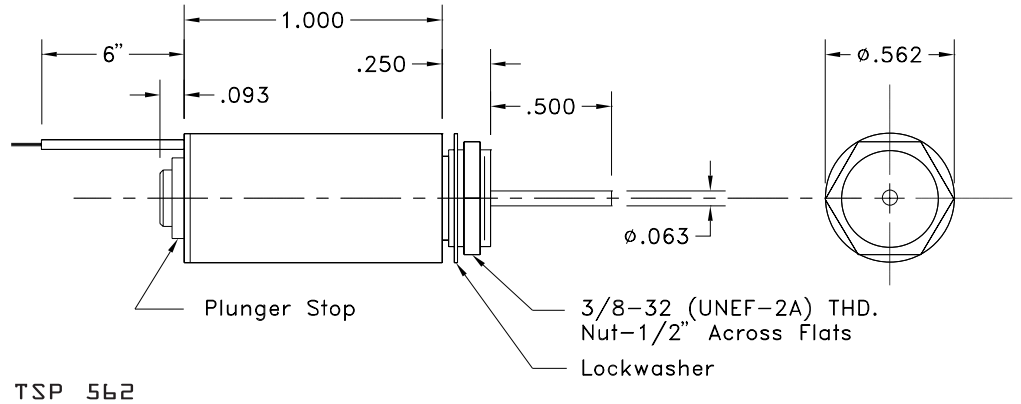

SPECIFICATIONS

1. MAXIMUM OPERATING TEMPERATURE: 130°C
2. LIFE EXPECTANCY UNDER OPTIMUM LOAD: 10⁶ CYCLES
3. DIELECTRIC STRENGTH: 1000 V. RMS
4. LEADS: AWG - 26 - U/L
5. TOTAL WEIGHT: 1 oz. (20 grams) MAX.
6. PLUNGER WEIGHT: .176 oz. (5 grams) MAX

Both Models Available with or without Plunger Stop.

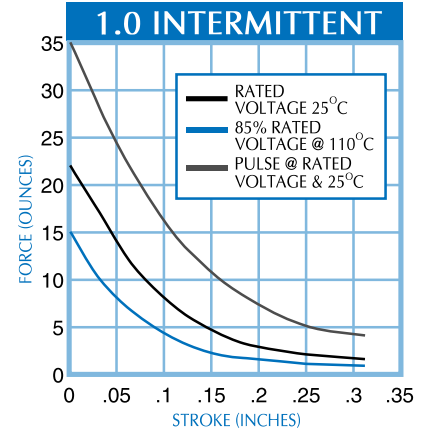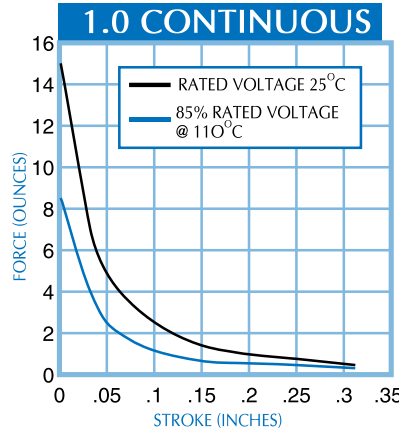

INTERMITTENT DUTY CYCLE AT NOMINAL VOLTAGE IS 1 MINUTE MAXIMUM ON TIME AT 10% DUTY. PULSE DUTY CYCLE IS 100 MILLISECONDS ON AT 10% DUTY.